

Self-test

The emergency kits carry out self-tests automatically to ensure its functionality.
The self-test includes 3 types of tests:

Initial test

- As soon as mains supply is connected, the emergency kit will carry out a 3-seconds functional test automatically.
- In case of a failure, the LED will turn permanent red. Otherwise, the charge mode will start.

Functional test

- Refers to charging, discharging and the functioning of load.
- Carry out for 10 seconds automatically every 30 calendar days.

Duration test

- Refers to the test of batteries capacity.
- Carry out every 180 calendar days.

Rest mode

Rest mode can be initiated during emergency mode by pressing test switch longer than 3 seconds.
The rest mode will be exited automatically after reconnect AC mains.

Reset method(choose either of below):

1. AC power off, press and hold test button more than 5s;
2. AC power off and unplug battery, wait 5s and plug battery.

* During initial installation, the indicator light might be showing red and fitting working properly,
please keep it charging for few hours, then reset, the indicator should change to green.

Please note

If mains supply is off during self-test period, emergency conversion module would terminate self-test immediately
and go into emergency mode.

Self-test is under the regulation of EN 62034.

Explanation of LED indicator

	Color	LED indication	Status	Comment
	Green	Slow flashing green (3 sec on, 1 sec off)	Charging Mode	AC mode
	Green	Permanent green	Fully Charged	AC mode
	Green	Fast flashing green (0.1 sec on, 0.1 sec off)	Function test underway	
	Green	Slow flashing green (1 sec on, 1 sec off)	Duration test underway	
	Red	Permanent red	Load failure	Open circuit/ Short circuit Led failure (emergency mode)
	Red	Slow flashing red (1 sec on, 1 sec off)	Battery failure	Battery failed the duration test or function test / No battery
		Green and red off	DC mode	Battery operation (emergency mode)


Test switch

The test button is a open switch , if you press it, it connects, and then you release it, it cuts off automatically.
When you are doing the daily maintenance , if you press the test button, the emergency driver goes into emergency mode,
if you release the button, the emergency driver will go back to normal mode.

Instruction manual

EM KIT Standard & Self Test 2-in-1

108097



Thank you for purchasing this accessory. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Relevant standard

IEC 61347-1
IEC 61347-2-7
EN 55015
EN 61547
EN 61000-3-2
EN 61000-3-3
EN 62493
AS/NZS 60598-2-22
AS2293.3

Warranty

- 5 years (2 years + 3 years) extended warranty.
- Except for the following circumstances:
 - 1) Improper installation or operation.
 - 2) Misuse.
 - 3) Abuse.
 - 4) Unauthorized or improper repair alteration.
 - 5) Accident or negligence in use, storage, transportation.
 - 6) Any natural acts.

Instructions for Disposal (End-of-Life Management): This product contains a battery which must be disposed of separately from household waste at the end of its life. To protect the environment and human health, please ensure proper disposal of this battery and the product.

Information for Recyclers: To ensure safe and efficient recycling, the battery should be removed by trained professionals in accordance with local regulations and industry best practices for battery recycling.

We are committed to responsible sourcing of raw materials used in our products, including batteries. We adhere to robust due diligence policies to prevent and mitigate social and environmental risks throughout our supply chain, in accordance with Regulation (EU) 2023/1542.

Technical data

Item	Data
Rated input voltage	220-240VAC,50/60Hz
Input current	<50mA
Iutput power	5W max
Power factor	>0.5
Terminal L-in / L-out (LED driver input constant)	AC 2A Max
Output voltage range	DC20...55V, Uout< 60V, SELV
Max output current	130mA
Output power (constant)	2.5W max;
Battery cells voltage/capacity	LiFePO4 3.2V 3200mAh,10.24Wh
Recharge current	300mA
Recharge time	24hours
Discharge time	180 minutes
Lumen factor	140lm/W
Max. casing temperature tc	70°C


Applications

- Use in dry environment.
- LiFePO4 battery pack.Easy to replace battery pack
- For use on a wide range of LED fittings to convert them from standard to emergency fitting.
- LED fitting would be maintained emergency LED fitting if standard (main powered) driver, emergency lighting kit and battery are all retained in the circuit. LED fitting would be non-maintained emergency LED fitting if only emergency lighting kit. and battery are retained in the circuit.
- Additional Relay that can control standard LED driver.
- Deep discharge protection.
- Ambient range ta 0...45°C
- IP20 protection, relies on end-product enclosure for protection against accidental contact live parts.
- Not intended for use in luminaries for high-risk task area lighting.
- Can close self test mode by dial switch.


Ordering data

Model No.	E.M Power	Duration	Battery Pack
Sax01-108097	DC20-55V 2.5W constant power	3 Hours	LiFePO4 3.2V 3.2Ah 10.24Wh

Dimensions

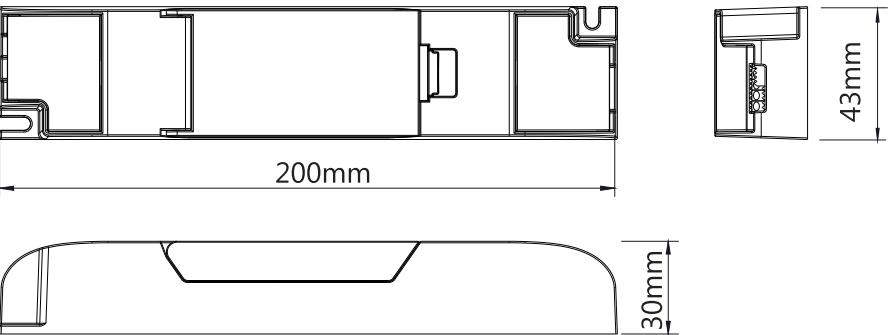

Wiring diagram

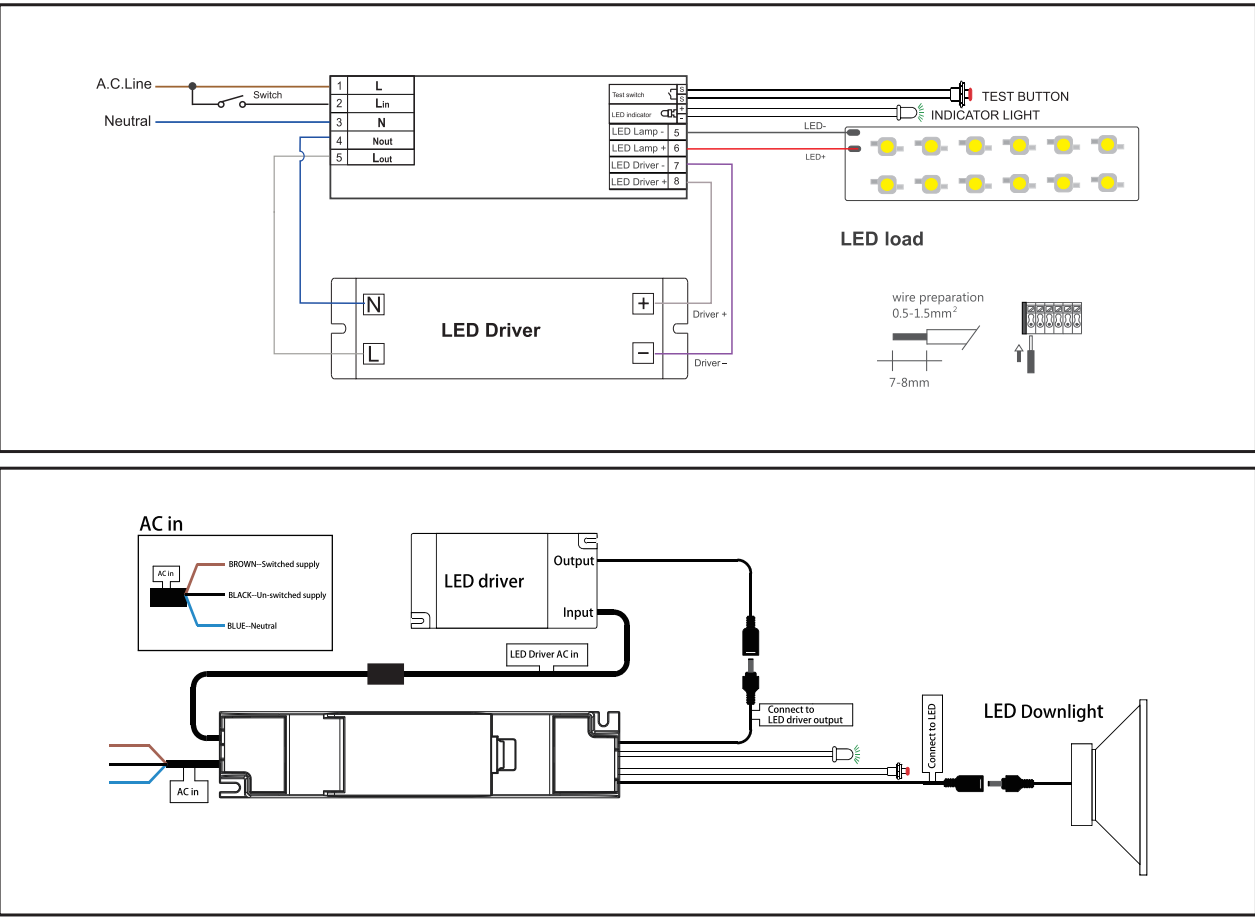

LED accessory (optional)

