


Wiring

Having correctly identified the wiring from your existing light fitting, Pull the mains wire through the hole and connect to the quick connection terminal in the following way.

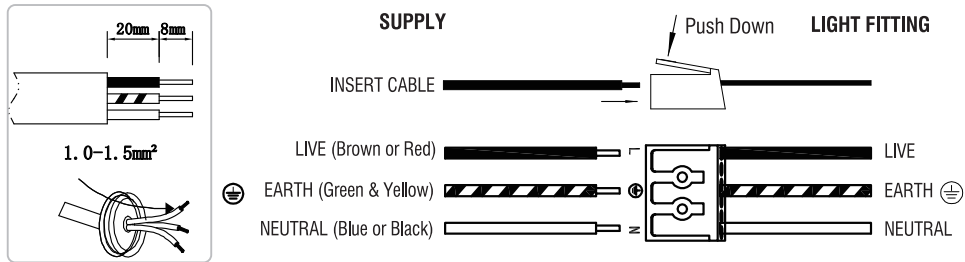

Check that...

You have correctly identified the wires. The connections are tight. No loose strands have been left out of the connection block.

Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 2 x 5W LED (SMD) CCT, 3000/4000/6500K. This product contains a light source of energy efficiency class **G**.



Conformity with all relevant UKCA Directive requirements.

Conformity with all relevant EC Directive requirements.



This product is Class 1, must be connected to earth.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is not suitable for dimming.



This product is rated at IP54.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish. For your safety, always switch off the power supply before cleaning.



This bulb is protected by a glass shade. This part must be replaced immediately should the glass shade become cracked or damaged. This fitting must not be used without the glass shade in place.

For further information, please visit <https://www.lighting-info.co.uk/97824>

V5 01/06/2026
UK Manufacturer: BH17 7BY
EU Manufacturer: Brilliant AG,
Brilliantstrasse 1, D-27442 Gnarrenburg

saxby
lighting

Instruction manual

Glover CCT 2LT Wall

97824



www.saxbylighting.com

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IET Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Layout

Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.

Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable.

The mains supply cable must have a minimum cross section area of 1.0mm².

Take care not to drill into any pipes or mains cables beneath the surface during mounting holes preparation.

Cables must be protected using suitable conduit or trunking.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

Note that the power needs to be isolated/switched off at the fuse board.

Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.

After deciding the layout of the light fittings ensure that the cables are long enough to connect to desired positions.

- Remove the outer cover. Use an inner hexagon wrench to turn the screws out to separate the rear base and lamp body.
- Place the rear panel of the lamp on the designated wall and mark the location with a marker pen. Drill a 30mm deep hole in the wall with a Ø6mm drill bit and insert the expansion tube into the hole.
- Choose the cable entry hole to open and pull the wire through the hole. Fix the rear panel to the wall with screws.
- Choose your preferred colour by using the CCT switch.
- Connect the cables to the quick fit connection referring to the wiring diagram.
- Fix back the lamp body into the rear panel and fix back the outer cover into the lamp.
- Adjust the angle of the light.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

