


Wiring

Having correctly identified the wiring from your existing light fitting, pull the mains wire through the hole and connect to the quick fit connection block in the following way.

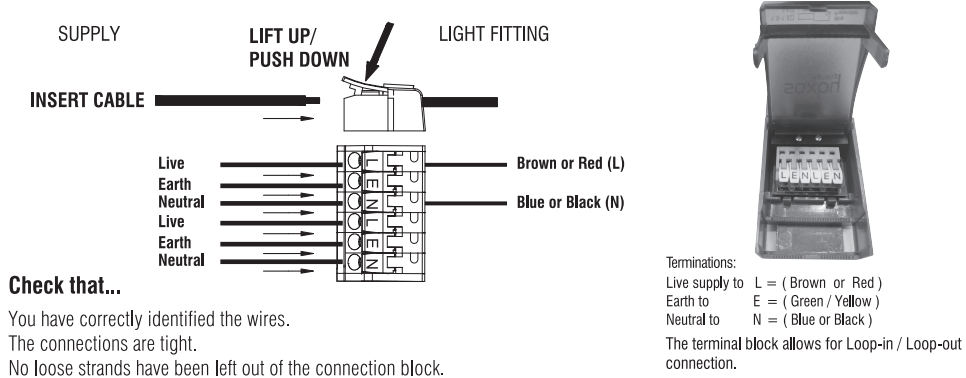

Check that...

You have correctly identified the wires.
The connections are tight.
No loose strands have been left out of the connection block.

Technical data

Supply Voltage:

220-240 V~, 50 Hz

Bulb Type:

4W/6W/8W LED (SMD) 4CCT, 2700K/3000K/4000K/6000K

This product contains a light source of energy efficiency class **E**.

Non-replaceable light source

Non-replaceable control gear

Conformity with all relevant UKCA Directive requirements.

This product is fire rated to 30, 60, 90 minutes.

Conformity with all relevant EC Directive requirements.

This product is rated at IP44.

The power supply is Double Insulated and does not require connection to an Earth circuit.

I-Joist fire rating to 30 mins

This product is suitable for dimming.

Steel web Joist fire rating to 30 mins

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
For your safety, always switch off the power supply before cleaning.

Replace Cracked Shade

This LED's are protected by a shade. The shade part must be replaced immediately should it become cracked or damaged. This fitting must not be used without the shade in place.

For further information, please visit <https://www.lighting-info.co.uk/103029>

V6 16/06/2026
UK Manufacturer: BH17 7BY
EU Manufacturer: Brilliant AG,
Brillantstrasse 1, D-27442 Gnarrenburg

saxby
lighting

Instruction manual

Shield360 4CCT Tri Wattage

103029, 106537, 119101, 119102, 125103



www.saxbylighting.com

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

 This light fitting is double insulated and does not require connection to an Earth circuit.

Please read these instructions carefully before commencing any work

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IET Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections

This product is suitable for covering with insulation 300mm.

This product complies with Building Regulations Part B and is suitable for use in 30, 60 & 90 minute fire rated ceilings.

The external flexible cable or cord of this luminaire cannot be replaced. If the cord is damaged, the luminaire must be destroyed.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Layout

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between each light fitting.

Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

The mains supply cable must have a minimum cross section area of 1.0mm².


Cables must be protected using suitable conduit or trunking.

When more than one downlight is installed, the minimum distance between units is 500mm. the unit must be located a minimum distance of 50mm from a joist.

This product must be mounted out of arms reach.

This product has special protection against the ingress of moisture and is IP44 rated.

This product is suitable for bathroom zone 1 & 2 and used in conjunction with a 30MA RCD.

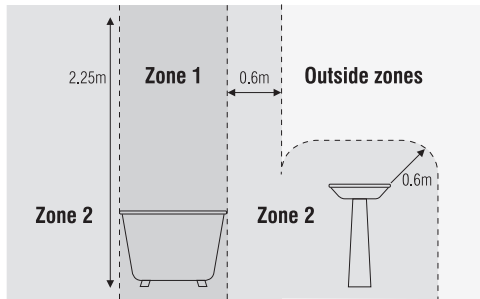

Installation


Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

The ceiling surface must be flat and smooth to ensure a good fit.

Note that the switch is turned off before installation.


Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.

- Cut a mounting hole 90mm diameter in the ceiling taking care not to foul any pipes, mains cables or joists beneath the surface (Ref. Fig.1). It is always recommended to cut the hole slightly smaller than the size specified, and then file the hole until the recessed unit fits snugly. Ensure a minimum ceiling void depth of 45mm is available.
- Open the terminal block cover. Connect the mains supply cable into the terminals (Ref. Fig. 2).
- Ref. Fig. 3. Choose your preferred wattage or colour before installing by wattage switch or CCT switch on the back of the product. **Note: Before you change the wattage or colour, please turn off the power for safety.**



Wattage Switch

The wattage is changeable between 4W/6W/8W using the wattage switch on the drive before installation.




CCT Switch

The colour is changeable between 2700K/3000K/4000K/6000K using the CCT switch on the drive before installation.

- Push the spring clips upwards and fit into the ceiling hole, then push the unit up until firmly in position, ensuring that no cables are trapped. (Ref. Fig. 4).
- Ensure that the product is sitting properly in the hole.
- Switch on. Your light is now ready for use.


Fig. 1

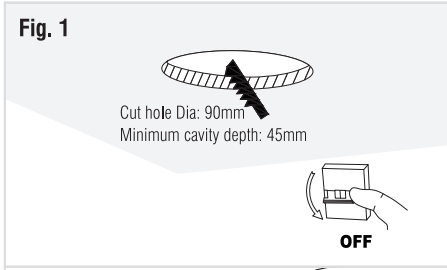

Cut hole Dia: 90mm
Minimum cavity depth: 45mm

OFF


Fig. 2

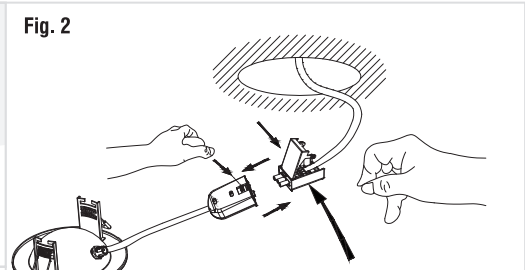

Terminations:

Live supply to L= (Brown or Red)
Earth to E= (Green/Yellow)
Neutral to N= (Blue or Black)

Fig. 3

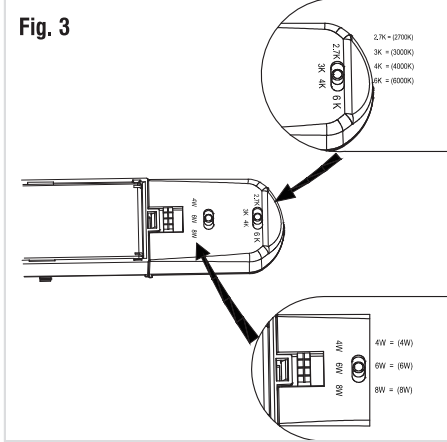

2700K (2700K)
3000K (3000K)
4000K (4000K)
6000K (6000K)

4W (4W)
6W (6W)
8W (8W)

Fig. 4

