



Connection

- The track accessories are provided with earth connection points on both sides.
- When offering the accessory to the track, verify which tab needs to be removed.
(See right side diagram).
- To remove the tab, grasp firmly with a plier and lever back. The tab should snap cleanly off.
- Locate the accessory in the track and push home.
- Locate the product in the track with the connections in the slot.
- Our recommendation would be to remove a section of material from the end of the track that is opposite to that of the live feed. This would ensure a perfect connection and trouble free operation. Always ensure that the locking screw is tightened.

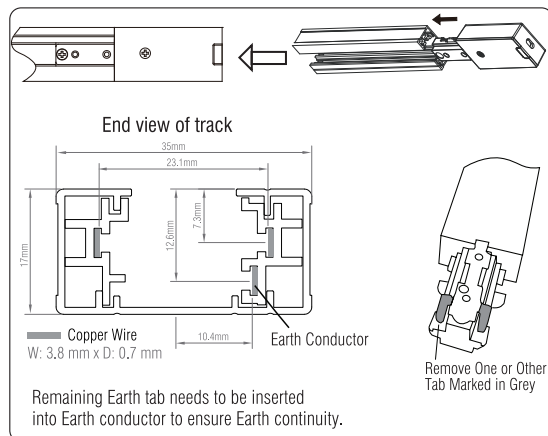

Wiring

- Undo the screw and remove the cover from the live end. Push out the desired cable access point.
- Identify the correct cable from the supply and pull through.
- Connect the supply wires to the terminal block, opposite the corresponding wires from the fitting.
The central connector can also be wired in this way.
- Refit the cover onto the live end taking care not to trap the cable.

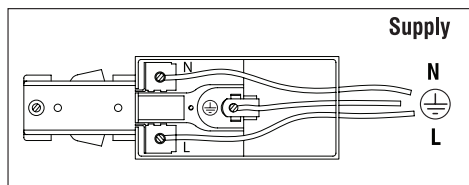

Check that...

You have correctly identified the wires.
The connections are tight.
No loose strands have been left out of the connection block.

Technical data

Supply Voltage: 220-240V~, 50Hz Max.16Amp

Power Load : Max. 3680W



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



This is a Class 1 product and must be earthed.



This product is for indoor use only.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
For your safety, always switch off the power supply before cleaning.

Instruction manual

Track 1m/2m/3m

78654, 78655, 78657, 78658, 78660, 78661



V9 14/07/2026

UK Manufacturer: BH17 7BY

EU Manufacturer: Brilliant AG,
Brillantstrasse 1, D-27442 Gnarrenburg

saxby
lighting

www.saxbylighting.com

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Check the pack and make sure you have all the parts listed.

Install in accordance with the IET Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.


This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Always switch off mains supply before fitting or servicing.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Track accessories

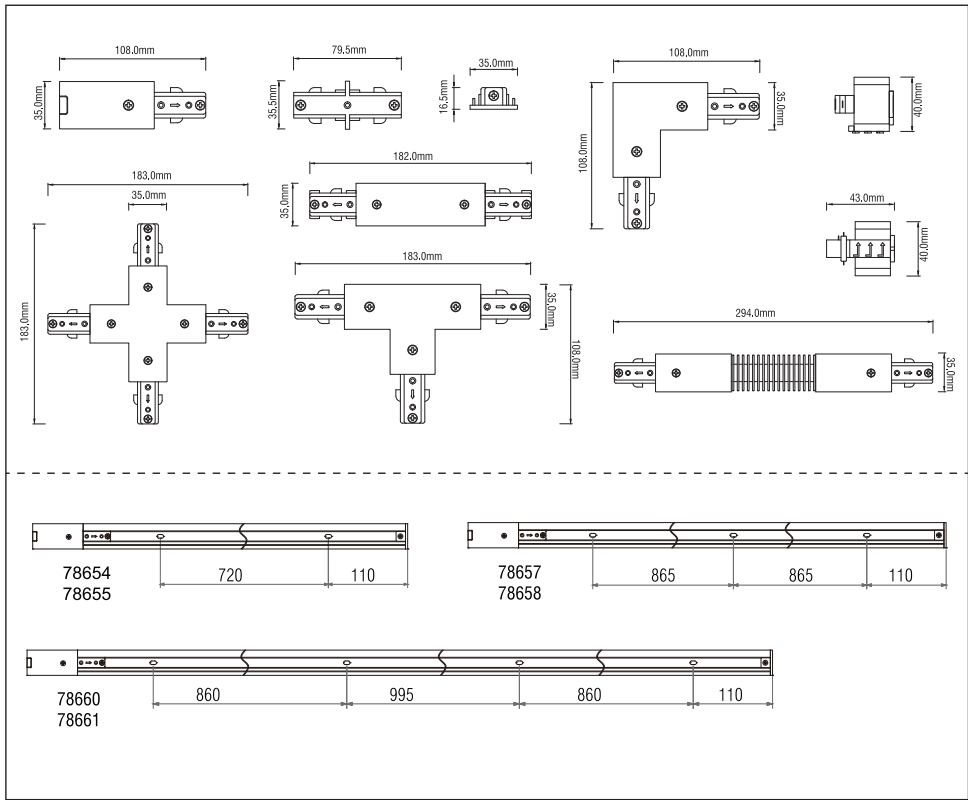


Layout

This track system can be extended to a variety of different configurations using accessories such as bends, right bends, **T** junctions, **X** junctions and flexible joints.

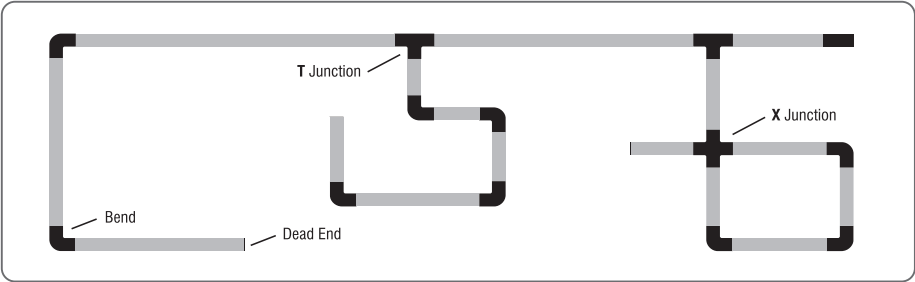

Installation

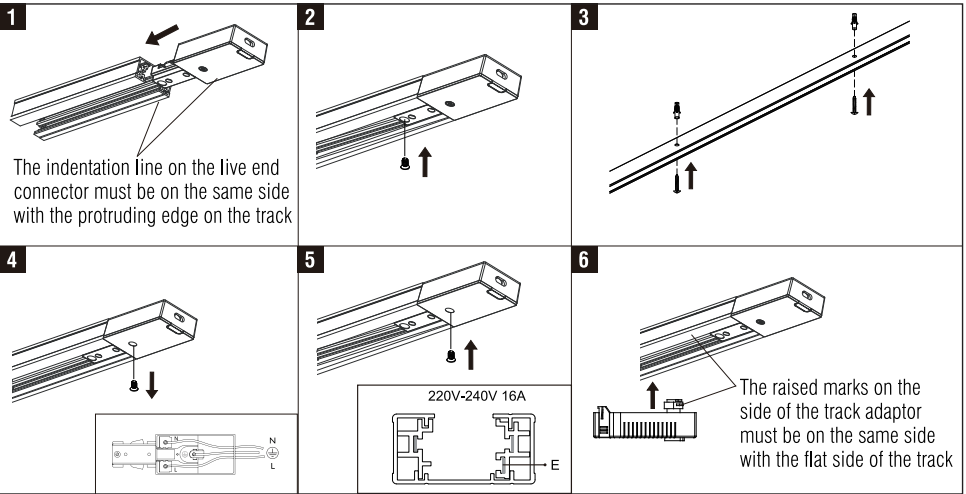

Cutting track

When reducing the length of track i.e. cutting down. It is recommended that a piece of masking tape be wrapped around the intended cutting area, this will ensure the powder coated or plated finish does not lift and chip.

It is recommended for a good electrical connection the installer should always mark out and cut track accurately using an engineers square prior to cutting. Ensure the copper conductors are pushed fully to one end of the track prior to cutting. the conductors should be towards the live end termination point.

Max total length of track/ load

Item	Model	Component for track system	Rating input	Max total load weight	Max total length of track
1	78654 / 78655	1 meter 3 wire track	220-240VAC,16A	Max. 10kg	50M
2	78657 / 78658	2 meter 3 wire track	220-240VAC,16A	Max. 20kg	
3	78660 / 78661	3 meter 3 wire track	220-240VAC,16A	Max. 30kg	

Note: Spot heads must be installed equidistantly, to avoid mounting all on one end of a track.