


## Wiring

Having correctly identified the wiring from your existing light fitting and connect to the connection block inside the product in the following way:

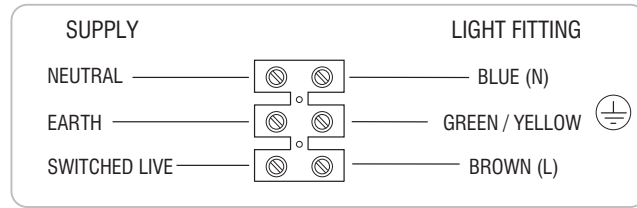

### Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- The lid has been refitted on to the connection block case.

## Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 8W LED module (SMD), CCT 3000/4000/6000K

This product contains a light source of energy efficiency class **E**.

 Non-replaceable light source

 Non-replaceable control gear



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



This product is Class 1, must be connected to earth.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is not suitable for dimming.



This product is rated at IP54.



This product is rated at IK08.

## Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish. For your safety, always switch off the power supply before cleaning.

For further information, please visit <https://www.lighting-info.co.uk/91801>

V3 15/12/2023

UK Manufacturer: BH17 7BY

EU Manufacturer: Brilliant AG,

Brilliantstrasse 1, D-27442 Gnarrenburg

saxby  
lighting

Instruction manual

# Tribeca CCT

EL- 40075, EL- 40076



EL- 40075

EL- 40076

[www.saxbylighting.com](http://www.saxbylighting.com)

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

This light fitting is Class 1 and must be connected to an Earth circuit

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This product is not suitable for location in or near a marine or sea environment.

The entire unit gets hot whilst on for a period of time.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Layout

This fitting must be mounted on either a concrete surface or a paving slab that has been concreted in position.

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between the junction box and the light fitting

Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The cable can be wired into an IP67 (or higher rated) external terminal block (recommended terminal block Ref. 90131/90132).

The mains supply cable must have a minimum cross section area of 1.0mm<sup>2</sup>.

Cables must be protected using suitable conduit or plastic trunking.

This product is suitable use for outdoor.

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

Note that the switch is turned off before installation.

Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.

This product must be installed into concrete or paving slab. It must not be installed into soil.

After deciding the layout of the light fittings ensure that the cables are long enough to connect to desired positions.

- Unscrew the screws on body of the product to separate the fixing base panel from the product. Use it as a template to mark the fixing holes on the mounting surface.
- Drill holes to the necessary size and depth - taking care not to damage any concealed pipes or wiring below the mounting surface.
- Thread the cable through the middle hole on the base panel.
- This product comes complete with screw and rawl plugs which are suitable for use on most surfaces, however alternative fixings may be required.
- Push the rawl plugs into the mounting holes.
- Fit base plate to mounting surface using supplied screws.
- Wire as detailed wiring diagram.
- Push the terminal block up into the tube.
- Locate the product in position and fit the screws to secure in place.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

This product is colour changing and can be either warm white (3000K) or cool white (4000K) or daylight white (6000K).  
**Choose your preferred colour by using the CCT switch under the top cover of the product.**

