


## Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connector block in the following way:

This unit is double insulated and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.



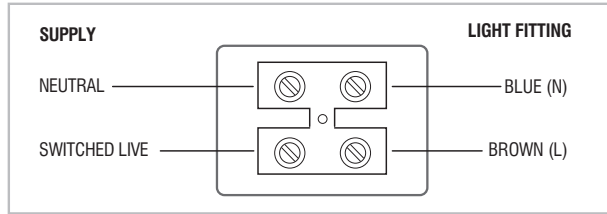




### Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

## Replacing bulbs

- Unclip the front bezel and let the bulb drop out.
- Twist the pins into the lampholder, and twist back into the product.
- Clip the front bezel back in position.

## Technical data

Supply Voltage:	220-240V~, 50Hz		Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.
Bulb Type:	78533/78535 - Max. 10W LED GU10 78534/78536 - 2 x Max. 10W LED GU10		Class II product - Double Insulated - No earth required.
	Conformity with all relevant UKCA Directive requirements.		This product is suitable for dimming.
	Conformity with all relevant EC Directive requirements.		

## Care and Safety

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- Always disconnect the product from mains at least 10 minutes allowing to cool down before any maintenance or adjustment.
- For your safety, always switch off the power supply before cleaning.



UK Manufacturer: BH17 7BY  
EU Manufacturer: Brilliant AG,  
Brillantstrasse 1, D-27442 Gnarrenburg

V5 08/08/2023

Saxby Lighting

www.saxbylighting.com

## Instruction leaflet

# Garrix

78533, 78535, 78534, 78536



UK  
CA CE

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instruction carefully before use to ensure safe and satisfactory operation of this product. Please retain these instruction for future reference.

## Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

If replacing an existing fitting, make a careful note of the connections.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This light fitting should be connected to a fused circuit.


The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

This product must be mounted out of arms reach.



Spotlights give a concentrated beam of light and must not be positioned any closer than 0.5M (50cm) to the illuminated surface.



Ensure free movement of air around the fitting by removing any roof void insulation from at least 150mm around the hole. Under no circumstances must these fittings be covered with insulating matting or similar material.



This product is NOT suitable for direct mounting on normally flammable surfaces (suitable only for mounting on non-combustible surfaces).

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

- This product has no special protection against the ingress of moisture.
- The unit must be located a minimum distance of 100mm from a joist.
- The ceiling surface must be flat and smooth to ensure a good fit.
- Cut the correct sizes hole using an appropriate tool: See **Fig 1**.
- Product layout. See **Fig 2**.
- It is recommended to cut the hole slightly smaller than needed, then file the hole until the recessed unit fits snugly.
- Fit the spring clips to the product by squeezing together, and locating over the tabs. Ensure that the bracket with the terminal block is fitted as well.
- Switch on. Your light is now ready for use.

