

119101

Shield360 4CCT Tri Wattage - Satin Nickel


FEATURES

- 5 years (2 years + 3 years) extended warranty
- Satin nickel plate finish
- Constructed from die cast aluminium alloy & steel & acrylic
- Timber Joist fire rating to 30, 60 & 90 minutes
- I-Joist fire rating to 30 mins
- Steel web Joist fire rating to 30 mins
- Cover in insulation
- Suitable for bathroom zone 1 & 2 and used in conjunction with a 30MA RCD
- 360° rotation
- IP44
- IK08



SPEC DATA

Product wattage:	4/6/8W
Product Lumen:	400/600/800
Product Lumen/W:	100
Kelvin:	2700/3000/4000/6000K
Energy Rating:	E
Dimmable:	Yes
Beam Angle:	60°
Power Factor:	0.9
CRI:	80
Lifetime (Hours):	30000
LED Type:	SMD
SDCM:	6
Driver Type:	Constant Current 120mA
Inrush Current at Start Up:	Max. 20A
Driver Out Voltage:	45-65V
Product Voltage:	220-240V
Hertz:	50/60
Surge Protection (KV):	1.5
Operating Temp:	-20 to 40 Degree
Product Weight (KG):	0.24
Cut out:	Ø90mm
Minimum Cavity Depth:	45mm
Terminal Block:	Push-fit 6 ways
Class:	2

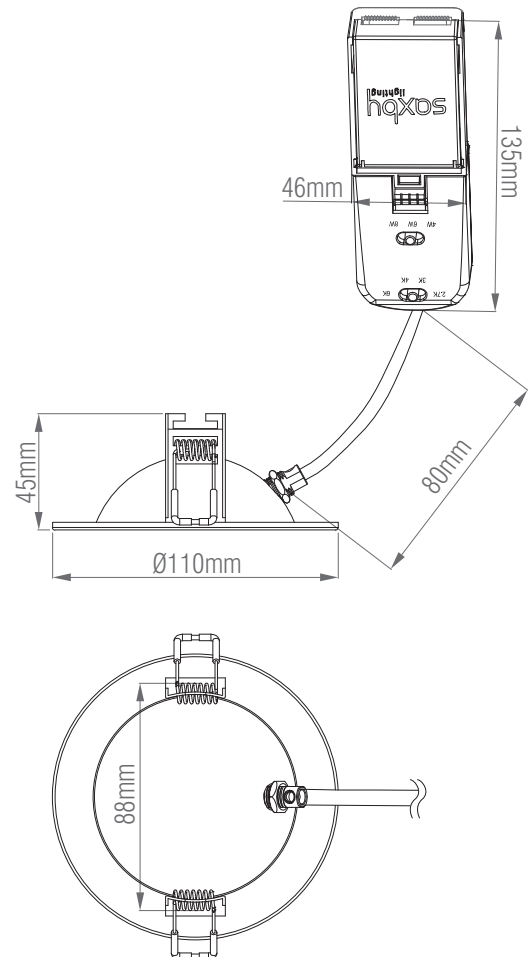

ACCESSORIES

- 103944, EM conversion kit 8W
- 113479, 100W dimmer module
- 113480, 250W dimmer module