


Constant Voltage 12V LED Driver

Features:

- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Non-Dimmable

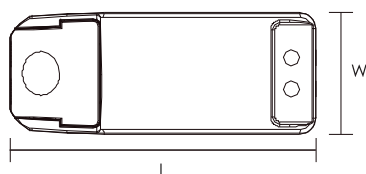

Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Min. Load (W)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature ta (°C)	Max. casing temperature tc (°C)	Isolaton	Dimensions LxWxH (mm)	Weight (g)
43810	220-240	12	12	0-1.0	0	0.80	80	<0.3	-20...+50	80	SELV	98x39x22	60
47989	220-240	20	12	0-1.7	0	0.80	82	<0.3	-20...+50	80	SELV	113x44x28	100
79335	220-240	60	12	0-5.0	0	0.95	88	<0.5	-20...+50	85	SELV	184x61x32	270