


Constant Current LED Driver

Features:

- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Non-Dimmable

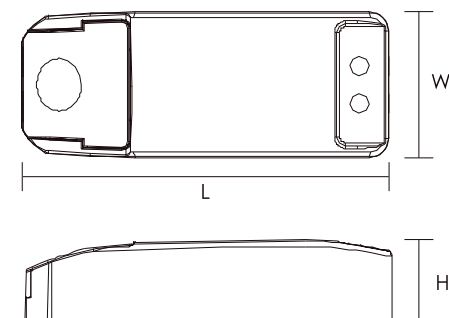

Parameters:

Model No.	Input voltage (V)	Output voltage (V)	Output current (mA)	Power factor (λ)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Type of light source for which it is intended	Efficiency full load (%)	No-load power (Pno in W)	Standby power (Psb in W)	Suit for dimming (Y/N)	Networked standby power (Pnet in W)	For OLED and HL Maxmium output power (W)	Max. output (W)	Dimensions LxWxH (mm)	Weight (g)
43816	220-240	2-34	350	0.80	-20...+50	80	LED	81	N/A	N/A	N	N/A	N/A	12	98x39x22	50
46896	220-240	2-58	350	0.80	-20...+50	80	LED	85	N/A	N/A	N	N/A	N/A	20	113x44x28	100