


# Constant Voltage 24V IP67 LED Driver

## Features:

- Primary and secondary sides come with leads
- Built-in Active PFC
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Surge protection: 4KV
- IP67 design for indoor or outdoor
- SELV equivalent
- Protection class I

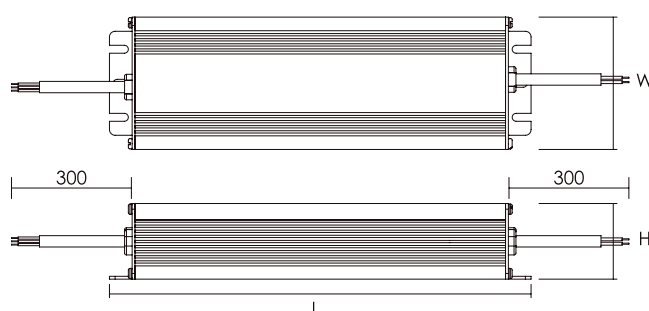

## Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Min. Load (W)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature $t_a$ (°C)	Max. casing temperature $t_c$ (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
79330	100-240	75	24	0-3.125	0	0.95	88	<0.5	-20...+50	80	SELV	199x67x35	800
79331	100-240	150	24	0-6.25	0	0.95	91	<0.5	-20...+50	80	SELV	191x70x40	800